



Ambisonic Subwoofer Collection

Hardscape Subwoofer



10HDR-AW-70V | 10HDR-AW-80HM

SPECIFICATIONS

System Type

Driver Components

Crossover

Frequency Response

Maximum SPL

Sensitivity, 2.83V @ 1m

Power Handling

Rated Impedance

Input Connectors

Enclosure Material

Dimensions (Ø x H)

Weight, Net / Shipping

Warranty

10HDR-AW-70V | 10HDR-AW-80HM

Vented Alignment Subwoofer

All Weather 10" Long Throw Woofer

Recommended HPF = 37Hz 12dB per octave Butterworth

35Hz - 300Hz | 50Hz - 300Hz +/- 3dB

118 dB Continuous, 124 dB Peak

93 dB

300W AES, 600W Max Power Handling, 1200W Peak

70V (10HDR-AW-70V) | OR | 8 Ω (10HDR-AW-80HM)

24" x 14AWG Pigtail with Waterproof Wire Nuts

Ported Composite

Ø 12.75" x 16.5" H (Ø 32.4cm x 41.9cm)

35lbs (15.4kg) / 39lbs (17.6kg)


Limited 5 Year Warranty

*All product specifications are subject to change. Please refer to ambisonicsystems.com for latest information.




Scan the QR Code for full instructions for this product.

80hm Wiring




Includes a pair of silicon filled wire nuts for the connection

SMOOTH wire is positive
RIBBED wire is negative

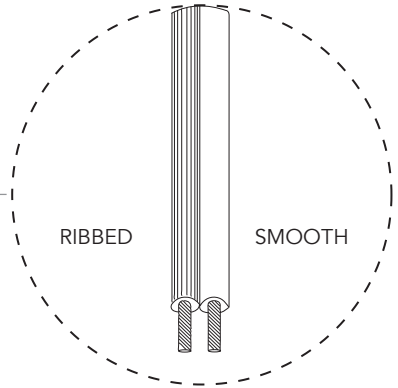

70V Wiring (Using JB1300)

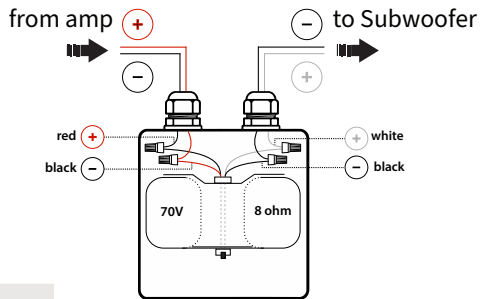

TECHNICAL ASSISTANCE

Please refer to ambisonicsystems.com for the full installation guidelines. If you have any questions or concerns about installing or using this product, you can reach us through one of the following methods:

Phone: (844) 674 - 4461

Hours of operation: 8:00am - 5:00pm (Pacific Time), Mon - Fri

Email: sales@originacoustics.com



06-04-24

6975 S Decatur Blvd, Las Vegas, NV 89118 • www.ambisonicsystems.com • 844-674-4461 • info@ambisonicsystems.com

©2024 Ambisonic Systems. All copyrighted, trademarked and patented elements mentioned herein are the sole property of Ambisonic Systems.