



## Ambisonic Subwoofer Collection

# Hardscape Subwoofer



## 12HDR-AW-70V | 12HDR-AW-8OHM

### SPECIFICATIONS

System Type

Driver Components

Crossover

Frequency Response

Maximum SPL

Sensitivity, 2.83V @ 1m

Power Handling

Rated Impedance

Input Connectors

Enclosure Material

Dimensions (Ø x H)

Weight, Net / Shipping

Warranty

### 12HDR-AW-70V | 12HDR-AW-8OHM

Vented Alignment Subwoofer

All Weather 12" Long Throw Woofer

Recommended HPF= 30Hz 12dB per octave Butterworth

33Hz - 300Hz | 41Hz - 300Hz (+/- 3dB)

123 dB Continuous, 129 dB Peak

93 dB

1000W AES, 2000W Max Power Handling, 4000W Peak

70V (12HDR-AW-70V) |OR| 8 Ω (12HDR-AW-8OHM)

24" x 14AWG Pigtail with Waterproof Wire Nuts

Ported Composite

Ø 18" x 18" H (Ø 45.7cm x 45.7cm)

54lbs (24.5kg) / 64 lbs (29kg)


Limited 5 Year Warranty

\*All product specifications are subject to change. Please refer to [ambisonicsystems.com](http://ambisonicsystems.com) for latest information.




Scan the QR Code for full instructions for this product.

## 80hm Wiring

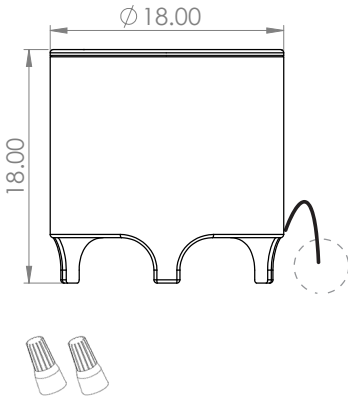


SMOOTH wire is positive  
RIBBED wire is negative

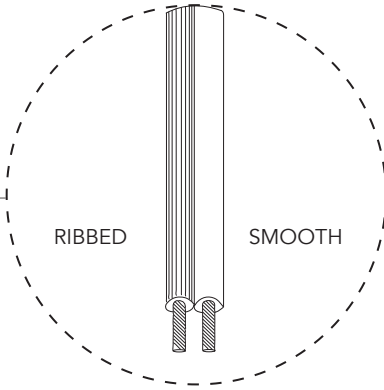

Includes a pair of silicon filled  
wire nuts for the connection

## 70V Wiring (Using JB1300)

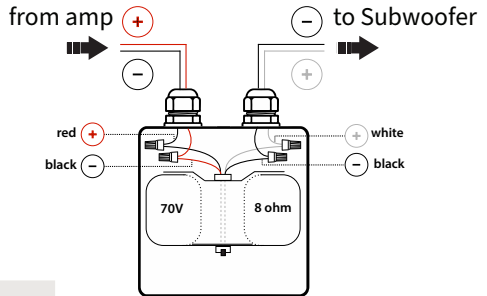

## TECHNICAL ASSISTANCE

Please refer to [ambisonicsystems.com](http://ambisonicsystems.com) for the full installation guidelines. If you have any questions or concerns about installing or using this product, you can reach us through one of the following methods:

Phone: (844) 674 - 4461

Hours of operation: 8:00am - 5:00pm (Pacific Time), Mon - Fri

Email: [sales@originacoustics.com](mailto:sales@originacoustics.com)



06-04-24

6975 S Decatur Blvd, Las Vegas, NV 89118 • [www.ambisonicsystems.com](http://www.ambisonicsystems.com) • 844-674-4461 • [info@ambisonicsystems.com](mailto:info@ambisonicsystems.com)

©2024 Ambisonic Systems. All copyrighted, trademarked and patented elements mentioned herein are the sole property of Ambisonic Systems.