



S11BP-70V / S11BP-8ohm

SPECIFICATIONS

S11BP-70V / S11BP-8OHM SUBWOOFER

System Type

Vertical Pass Subwoofer

Driver Components

11" All Weather Dual Voice Coil
Polypropylene Woofer

Frequency Response

41Hz – 150Hz (+/- 3dB)

Max SPL @ 1m

113dB Continuous, 119dB Peak

Sensitivity, 1m/2.83V

90dB

Power Handling

200W x 2 AES 400W X 2 Peak

Input Connectors

Pigtail with Waterproof Wire Nuts

Enclosure

All weather, molded composite

Installation

In-Ground, Recommended Depth 9" (22cm)
(leave 6" or 15cm gap under canopy)

Transformer (S11BP-70V)

In-Ground 2 X 70V 100W (JB2100 Transformer)

Dimensions


12.20" Diameter x 23" H (Enclosure)
17" Diameter x 8.40" H (Canopy)

*All product specifications are subject to change. Please refer to ambisonicsystems.com for latest information.





Scan the QR Code for full instructions for this product.

70V / 80hm Wiring



Includes two (2) pairs of silicone filled wire nuts for the connection

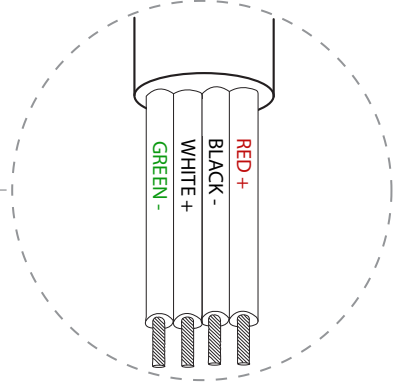

70V Wiring (Using JB2100)

from amp



R CH.

(+) RED

(-) BLACK

L CH.

(+) RED

(-) BLACK

to subwoofer



SUB R CH.


(+) RED

(-) BLACK

SUB L CH. VC

(+) WHITE

(-) GREEN



Subwoofer Voice Coil #1
RED wire is positive (+)
BLACK wire is negative (-)

Subwoofer Voice Coil #2
WHITE wire is positive (+)
GREEN wire is negative (-)

TECHNICAL ASSISTANCE

Please refer to ambisonicsystems.com for the full installation guidelines. If you have any questions or concerns about installing or using this product, you can reach us through one of the following methods:

Phone: (844) 674 - 4461

Hours of operation: 8:00am - 5:00pm (Pacific Time), Mon - Fri

Email: sales@originacoustics.com



06-19-24

6975 S Decatur Blvd, Las Vegas, NV 89118 • www.ambisonicsystems.com • 844-674-4461 • info@ambisonicsystems.com

©2024 Ambisonic Systems. All copyrighted, trademarked and patented elements mentioned herein are the sole property of Ambisonic Systems.